

Classification:
Reference:
Date:

EL07-039

ITB07-042

November 9, 2007

2008 G35, G37, QX56; INFINITI VOICE RECOGNITION SYSTEM UPDATE

APPLIED VEHICLES: 2008 G35 Sedan (V36) with Navigation System
 2008 G37 Coupe (CV36) with Navigation System
 2008 QX56 (JA60) with Navigation System

SERVICE INFORMATION

The Applied Vehicles listed above had a running change to the Infiniti Voice Recognition System.

The newer system has a simplified "Standard Mode" (which is the default mode) and an "Alternate Command Mode" for the more advanced user.


Many of the same features of the early system are available on the newer system, although some commands related to the following functions are deleted from the newer system.

System	Commands related to the following are deleted in the newer system:
Navigation	Specific POI names Specific map zoom (scale values)
Phone	Numbers spoken as groupings (i.e. 17 stated as "seventeen")
Audio	Direct satellite radio stations Radio presets Direct tuning frequencies Direct CD track numbers
Climate Control	Direct temperature settings (60 – 90 degrees)

Any vehicle built after the following VINs and Dates has the newer system:

Model:	VIN:	Date:
G35 Sedan 2WD	JNKBV61E(*)8M 201809	August 30, 2007
G35 Sedan AWD	JNKBV61F(*)8M 251895	August 30, 2007
G37 Coupe	JNKCV64E(*)8M 106576	August 30, 2007
QX56	5N3AA08(**)8N 904804	September 28, 2007

NOTE: Some vehicles built prior to the above VINs and Dates may have had the newer system installed at the Port. To confirm that the vehicle has the newer system, select the "Settings" Button, then on the screen select "Others > Voice Recognition" and see if the option for "Alternate Command Mode" is present.

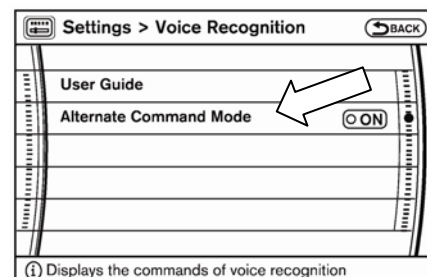

For details on the operation of the Infiniti Voice Recognition System in the vehicle you are working on, refer to:

- For the early system – the appropriate Owner's Manual.
- For the newer system – 2008 Voice Recognition supplement.